


### Electrical Specifications


Frequency Range(MHz)	902-928	902-928	902-928
Gain(dBi)	9.0	9.0	9.0
VSWR	≤1.3	≤1.3	≤1.3
Polarization	Circular	Horizontal	Vertical
Horizontal Beam width	68°	59°	70°
Vertical Beam width	59°	65°	58°
Input Impedance	50 Ω	50 Ω	50 Ω
Max. Input Power	50 W	50 W	50 W
Lightning Protection	DC Ground	DC Ground	DC Ground

### Mechanical Specifications

Connector	N-Female	N-Female	N-Female
Dimensions(mm)	305×305×30	305×305×30	305×305×30
Weight(kg)	1.0	1.0	1.0
Reflector Material	Aluminum	Aluminum	Aluminum
Radome Material	ABS	ABS	ABS
Ingress Protection	IP65	IP65	IP65
Operating Temperature	-40°C to +65°C	-40°C to +65°C	-40°C to +65°C
Mounting Pole(mm)	Ø38-Ø52	Ø38-Ø52	Ø38-Ø52

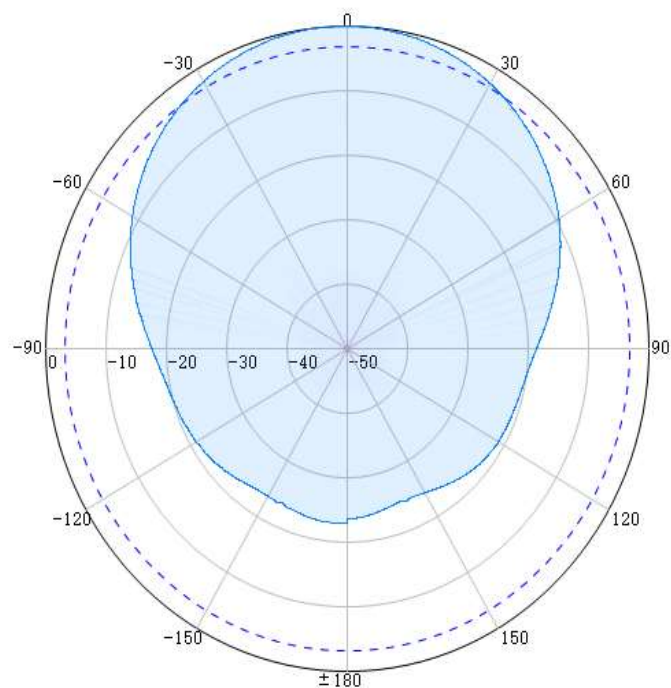

Horizontal (915MHz)

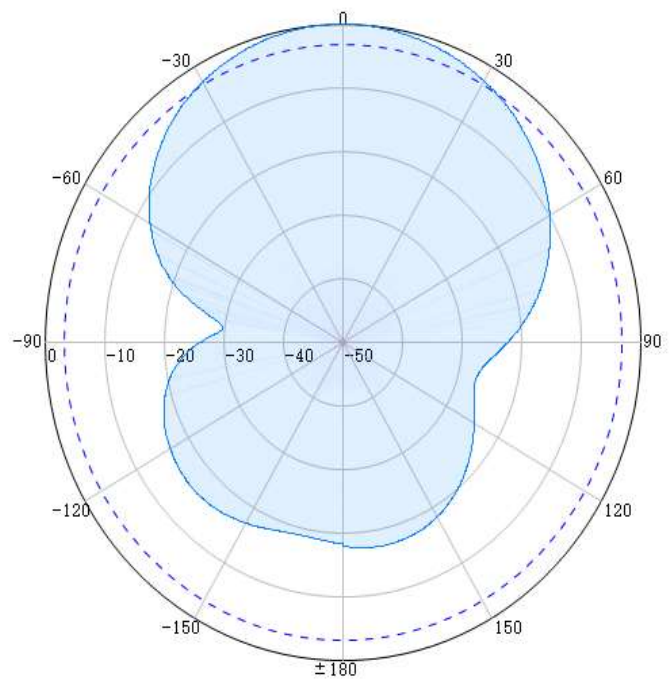

Vertical (915MHz)